



## 2026 ChemE Cube™ Problem Statement

---

### Document Revision History

Version (Date)	Comment
1.0 (February 2026)	Initial release of 2026 competition rules
1.1 (February 2026)	Edits to the Formulas
1.2 (February 2026)	Update to Units in Formulas
1.3 (March 2026)	Update to Mass Weighted Formula



# ChemE Cube™ Competition 2026

Problem Statement: Modular Direct Air Capture

## Business Objective

The carbon cycle is nature's way of recycling carbon atoms from the atmosphere to the terrestrial organisms, ocean, land, and then back into the atmosphere. With the introduction of human carbon emissions, there has been a net positive increase of carbon dioxide in the air. Carbon dioxide emissions are the largest greenhouse gas (GHG) emissions globally, accounting for 76% of all GHG emissions annually<sup>1</sup> and reaching 34.8 billion tons in 2020.<sup>2</sup>

The rising CO<sub>2</sub> emissions leads to increasing global temperatures rise in ocean acidification, and disruption of ecosystems. The effects of climate change can directly and indirectly impact human health. To address this global issue, the 2015 Paris Climate Change Agreement was enacted, combatting the rise of global CO<sub>2</sub> emissions. Its goal is to limit global warming to 1.5°C.<sup>3</sup>

There are different ways to reduce the amount of CO<sub>2</sub> emitted. Conserving energy, efficient energy use, switching fuel type, and changes in use of land and land management practices help reduce the amount of CO<sub>2</sub> emitted. Carbon capture and storage (CCS) can be used to capture CO<sub>2</sub> at the point where it is emitted to keep it from entering the atmosphere. However, even after employing all these approaches, many external technology assessments<sup>4</sup> suggest that additional steps will be needed to meet stated climate goals. This includes the deployment of direct air capture technologies, where CO<sub>2</sub> in the air is removed and sequestered.<sup>5</sup> This is what your design should achieve.

You are tasked with creating a modular direct-air capture mini-plant that can fit inside a cube that is 1-foot in length, width, and height. **The goal is to capture as much CO<sub>2</sub> as possible from the surrounding air during the run time. This does not necessarily mean that your cube should have a CO<sub>2</sub> output of zero parts per million (ppm). Rather, teams are highly encouraged to find a balance between high flowrates, cost, power usage, and cube weight to achieve the maximum amount of points.** It is also important that your cube design is efficient to minimize the CO<sub>2</sub> emissions associated with the energy used to power the mini plant. You will have a maximum budget of \$2,500 for your first-of-a-kind prototype. Your design should be marketable as a modular CO<sub>2</sub> capture device. Ultimately, it should create an impact by demonstrating technological breakthroughs, address a need in the market, and benefit humanity.

---

<sup>1</sup> <https://www.epa.gov/ghgemissions/global-greenhouse-gas-emissions-data>

<sup>2</sup> <https://ourworldindata.org/co2-emissions>

<sup>3</sup> <https://unfccc.int/process-and-meetings/the-paris-agreement/the-paris-agreement>

<sup>4</sup> <https://www.iea.org/reports/net-zero-by-2050>

<sup>5</sup> [An updated roadmap to Net Zero Emissions by 2050 – World Energy Outlook 2022 – Analysis - IEA](#)



## Related Efforts

The following related efforts may help to provide clarity and resources to you as you develop your cube:

- The United States' National Energy Technology Laboratory Direct Air Capture (DAC) Center supports rapid development and commercialization pathways for technologies that remove CO<sub>2</sub> from the atmosphere.<sup>6</sup>
- XPRIZE hosts a competition revolved around the removal of carbon dioxide.<sup>7</sup> They have noted three grand challenges that come with carbon dioxide removal: 1) Massive scale required for carbon dioxide removal, 2) Current DAC solutions are too expensive, and 3) Structural incentives are lacking from both the government and markets.
- The Direct Air Capture (DAC) Coalition supports the international effort to address the climate challenge by bringing together diverse, leading global innovators to educate, engage, and mobilize DAC technology.<sup>8</sup>
- Carbon Dioxide Removal Primer is a new online resource on the fundamentals of carbon dioxide removal and its role in addressing the climate crisis.<sup>9</sup>

---

<sup>6</sup> <https://netl.doe.gov/dac>

<sup>7</sup> [\\$100M Prize For Carbon Removal | XPRIZE Foundation](#)

<sup>8</sup> [Direct Air Capture Coalition \(daccoalition.org\)](https://daccoalition.org)

<sup>9</sup> <https://cdrprimer.org/>



## The Virtual Qualifying Presentation

Teams will first compete in a virtual qualifying presentation (VQP) to showcase their concept of their cube. The VQP should focus on the problem and your solution, why your solution is the best, the unique value proposition, preliminary calculations highlighting how your design can capture CO<sub>2</sub> effectively, and provide an overview on safety. Refer to the VQP rubric for grading criteria. During this time, teams should **not** build an actual cube. The teams selected at the conclusion of the VQP judging process will move on to compete in the in-person competition.

We highly recommend using [\*The Value Proposition Matrix: An Innovator's Guide to Four Questions That Separate Success from Failure\*](#) as a resource to develop your business plan and properly explain your value proposition (This book will also be a good resource for [The Pitch](#)).

## \*New\* Logo Design Challenge

Teams will design a custom logo that represents their unique identity and engineering vision. This is your opportunity to build your brand, express your team's personality, and stand out from the competition. Make your mark—literally—and create a logo that captures what makes your team special! More details coming soon!

## \*Reimagining the Ad!\*

Get ready for an exciting evolution of the advertisement challenge! The competition is reimagining this component to give teams even more creative freedom and opportunities to showcase their innovation. Stay tuned for details that will make this your chance to truly stand out and bring your cube to life in ways you never imagined.

## The Poster

A poster must be displayed with the ChemE Cube on the day of the competition. Most of your team's technical description of your cube belongs on the Poster, including all references. Teams should use the poster template provided here. This poster should clearly describe:

1. Unique and innovative features of the cube
2. Cube design description, drawings, and testing results
3. PI and MCPI elements of the cube
4. A breakdown of the total capital equipment costs (including manufacturing costs)
5. The safety features/inherently safer design concepts applied to the cube
6. Reference material and data

Refer to the Competition Rules for information about the required format and content. Refer to the Poster rubric for grading criteria.



## The Pitch

Teams will have twenty minutes to pitch their process to a panel of industry members. This pitch is expected to include elements that a start-up company formed to commercialize your cube technology would present to a group of angel investors, such as an IP and patent plan, understanding of the market, competitive advantage, financing required to bring the technology to market, and value proposition to the customer. Ten minutes is allotted to the presentation and ten minutes for Q&A. See the rubric for exact criteria. *Important distinction: while you should highlight the unique and valuable aspects of your cube design, this is not a heavy technical presentation but a business pitch. The goal of The Pitch is to get someone to invest in your technology. You will act as if you are looking for seed funding as a newly formed startup and bringing a brand-new product to market.*

During the 10-minute pitch, teams will present the following, but are not limited to:

1. What's The Context?
  - a. Background of the Problem or Opportunity
  - b. Proof of Market
2. What's The Solution?
  - a. Novel Design Overview
  - b. Potential Impact for Market
  - c. How the product will scale using PI and MCPI principles
3. How are you protecting your design?
  - a. What is your IP plan?
  - b. What portion of your design can you patent?
4. What are your financials?
  - a. Capital Costs
  - b. Operating Costs
  - c. Profits
5. The Competition
  - a. Competitive Landscape
  - b. Key Differentiators
6. Why Should You Invest?
  - a. Value Proposition
  - b. Sustainability
  - c. Intellectual Property Considerations

During the 10-minute Q&A, judges will pose questions about all aspects of the cube from the perspective of a potential investor – from design, to costs, to output. While it is anticipated that one team member may have specialized in one area over others, it is expected that each team member will be able to answer the judges' questions. Refer to the Pitch rubric for grading criteria.

## The Run

The following below explains the different components of the run such as how the cube is set up during the competition, any requirements, and a breakdown of the scoring, including supplemental metrics that aren't scored directly, but affect the final score. Each team will get two runs.

### Power

Cubes will be supplied with DC current only to allow for the use of off-grid power sources such as solar or wind power. Regulated 12 V DC power will be provided for the competition. Your plant must use exactly 12 V. For safety reasons, cubes may not exceed 10A or 120 watts. Cubes operating at a higher wattage will not pass safety inspection and therefore will not be able to compete. Power connections will be provided from standard male banana jacks (socket) color coded red and black to indicate polarity. Your cube must provide **female** banana plug socket interfaces to power your cube's equipment that will connect with the male banana plugs supplied by the staff (See Figure 1). Cubes should provide suitably insulated, properly gauged leads terminated in standard female banana plugs to access the provided power. (See Figure 2 for reference). During the runs, total power consumption will be measured using an in-line power meter.




Figure 1: Male banana plugs from supplied power supply that must interface with your cube.



Figure 2: Connection Points for Power for Cube - Notice the example cube is providing female banana jack connections.

## Inlet

- At the inlet side, teams will need to pull air (via suction) from the air inlet ballast tank into their system. This is to prevent large fluctuations of CO<sub>2</sub> concentrations during the run.
- Air will NOT be pumped into your system.
- A single CO<sub>2</sub> meter connects directly to the ballast tank to record the concentration of CO<sub>2</sub> at the inlet.
- A rotameter connects the ballast tank and the cube to monitor the inlet flowrate. Teams are not required to install a flowmeter in their cube.
- The inlet flowrate must be between 5 SCFH and 20 SCFH (2.4 L/min – 9.4 L/min).
- Teams are advised to have adequate tubing sticking out of their cubes (3" to 10"). The setup during the competition will provide adequate length tubing from the ballast tank to connect to each team's cube.
- Teams must use PVC tubing with 1/8 inch I.D. and 1/4 inch O.D. to ensure proper connection with the supplied connection point (See Figure 3 for reference).
- Teams must label cube inlet connection to avoid accidental backflow line-ups.

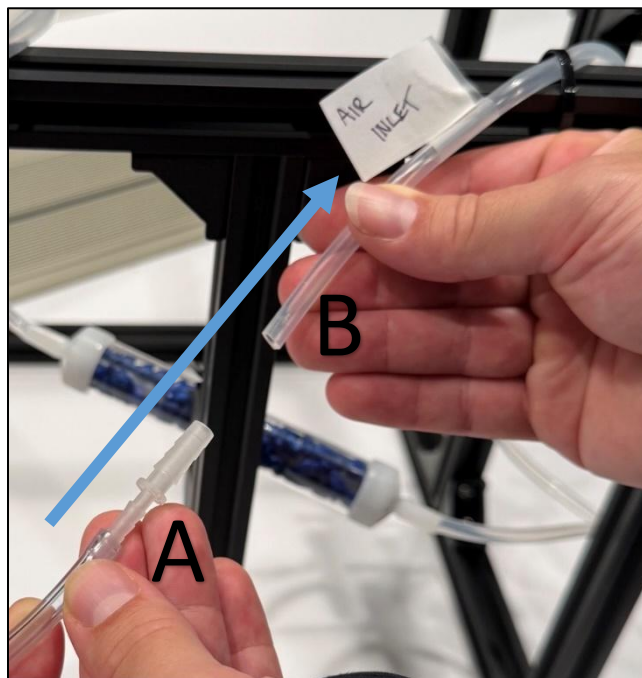

*Figure 3: Connection Points for Cube Inlet. Point A is the connection source from the ballast tank and flowmeter that are provided during the competition. Point B is the Cube Air Inlet. Air will flow in the direction shown by the blue arrow.*

## Outlet

- The CO<sub>2</sub> meter will run in parallel “sample loop” configuration, as seen in Figure 5, to avoid excess pressure drop of sending all product air through the meter.
- The flowrate is monitored by a rotameter after the CO<sub>2</sub> meter. The outlet flowrate must be between 5 SCFH and 20 SCFH (2.4 L/min – 9.4 L/min).
- Teams are advised to have adequate tubing sticking out of their cubes (3” to 10”). The setup during the competition will provide adequate length of tubing in the downstream portion of the setup to connect to your cubes.
- Teams must use PVC tubing with 1/8 inch I.D. and 1/4 inch O.D. to ensure proper connection with the supplied connection point (See Figure 4 for reference).
- Teams must label cube outlet connection to avoid accidental backflow line-ups.

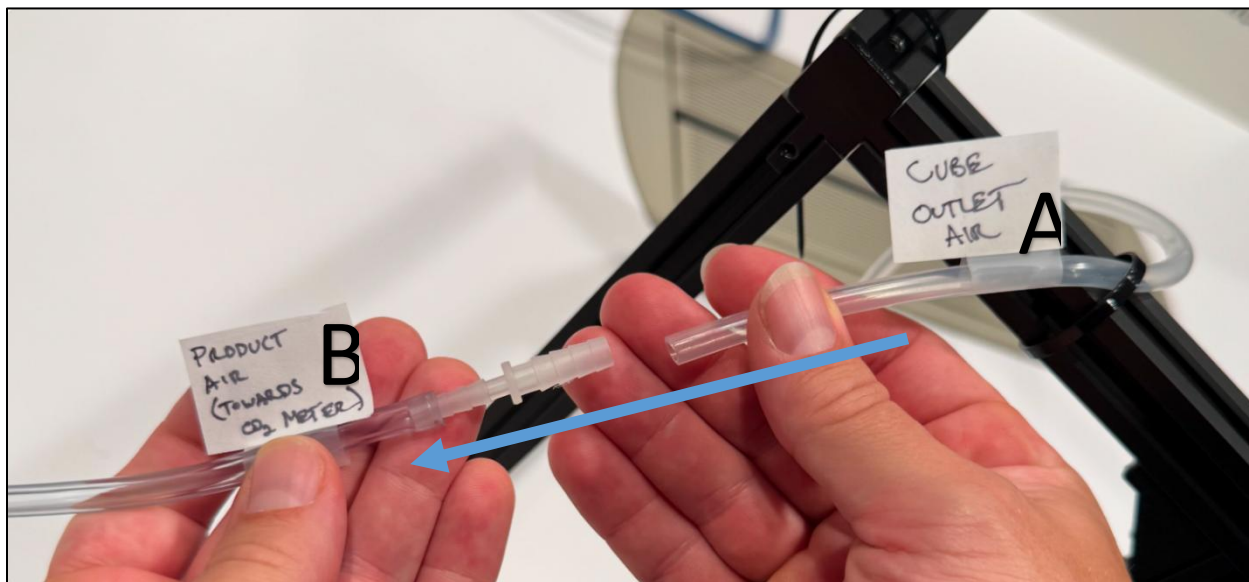


Figure 4: Connection Points for Cube Outlet. Point A is the Cube Air Outlet. Point B is the connection source to the CO<sub>2</sub> meter and rotameter that will be provided during the competition. Air will flow in the direction shown by the blue arrow.

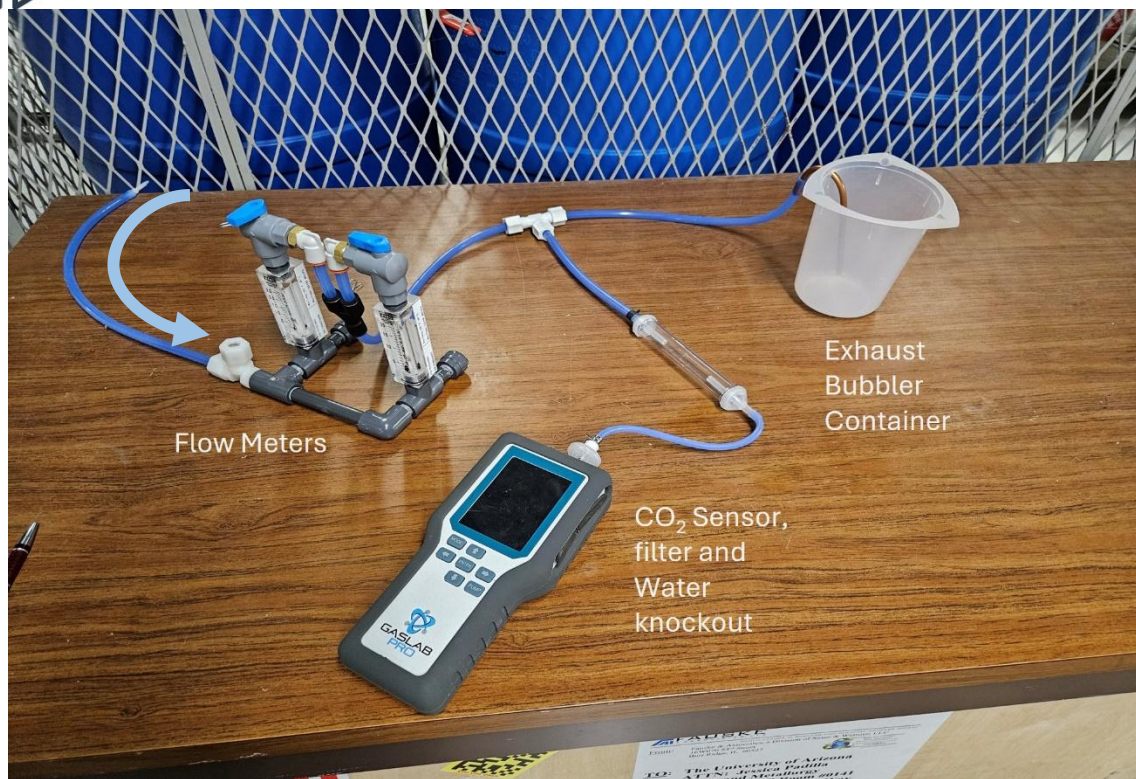


Figure 5: Parallel Setup of CO<sub>2</sub> Meter at the Outlet. The meter will pull air from the outlet at a flowrate of 0.1 L/min and release it into the atmosphere. The blue arrow represent the flow of air from the cube to the flowmeters.

### Regeneration Questionnaire

Due to the difficulties of incorporating a regeneration step in your cubes for the competition (safely in a conference center environment), we are continuing on using the regeneration questionnaire. Teams will use to evaluate this for their hypothetical regeneration process. Each regeneration method will have its own price and is considered in the “Total Cost to Capture” criteria. (Refer to [Cost to Capture Calculations](#)) The price of the regeneration will be calculated based on the energy/heat required to bring the specific adsorbent to its regeneration temperature, and to overcome the desorption/reaction energies necessary to evolve CO<sub>2</sub>. Regenerations for systems with stronger CO<sub>2</sub> binding energies will be more energy intensive, and some proposed methods will have added complexity accounted for in the cost to regenerate. The amount of material subject to this regeneration calculation is based on your total sorbent weights, regardless of actual CO<sub>2</sub> loading in the run. As such, it behooves teams to minimize excess sorbent in your cube. Below are the possible categories you may choose for regeneration:

- Strong aqueous base
- Strong aqueous base with causticization step (cube must precipitate a calcite during the run to claim this regen benefit)



- Strong aqueous base with a Bi-Polar Membrane Electrodialysis system (cube must include a BPMED membrane use in the run to claim this regen benefit)
- Amino Acid based capture system (i.e. PyBIG)
- Ion exchange resin with TSA
- Ion exchange resin with TVSA (applicants must provide supplemental assessment why TVSA is more economical or feasible than TSA)
- Supported MOF with TSA
- Supported MOF with TVSA (applicants must provide supplemental assessment why TVSA is more economical or feasible than TSA )
- Supported amine (i.e. PEI) with TSA
- Supported amine (i.e. PEI) with TVSA (applicants must provide supplemental assessment why TVSA is more economical or feasible than TSA)
- Algae/Bio base assuming some form of bio-sequestration (i.e. BECCS)
- Moisture Swing (i.e. ion exchange resin)

In addition to the score-contributing regeneration cost calculation based on the qualifying methodology, teams must provide calculations explaining the expected regeneration costs for their DAC systems. These calculations should use literature citations or commercial product specifications to define the sorbent specific regeneration temperatures, heat capacities, heats of reaction, sorbent loadings, type of energy inputs, energy prices, a description of the process flow required to perform the regeneration, and a calculation showing what you would expect your regeneration costs would be on a \$/ton of sorbent, and \$/ton CO<sub>2</sub> basis.

Teams can find the regeneration questionnaire on the ChemE Cube website.

### Weight regulations

Your cube is measured twice during the competition, in order to correctly measure the total amount of sorbent in your cube. The first weigh-in will take place during the safety inspection. **Here, cubes will have no adsorbent loaded.** The second weigh-in will take place during the run. Here, cubes will be loaded with adsorbent. Major physical modifications are not allowed in between the two weigh-ins. If a small modification is needed, your cube will be weighed again.

### Pricing of Materials \*New Update\*

This year, we are aiming to standardize the pricing even further. Teams will utilize a curated shopping list to calculating the capital cost of their cube. Teams can still order chemicals as before. The shopping list is currently being developed.

- **Critical Rule:** The cost basis you select from the shopping list must match the class of materials your cube is actually made from. For example, if your cube frame is constructed from wood, you must use the wood frame pricing from the shopping list. You cannot build with 1" strut and claim wood pricing, or vice versa.



For 3D printed and machined parts, there is an overhead charge of \$200 not including material used. To price the material, teams will take the percentage of material used and multiply that percentage by the cost of the said material (use McMaster-Carr prices). For example, a spool of [black, good tensile strength, PLA filament](#) costs \$47.27 and weighs 1000 grams. After printing, the final product (including the supports) weighs 600 grams, so 60% of the filament was used. Therefore, the price of filament that was used is \$28.36. This price will be used in the capital cost.

Below is an example-pricing chart that can be used as a template when showing capital cost on the EDP.

Item	Price	Qty/Amt Used (kg)	Total Cost
<a href="#">3-Way Outside Corner End Bracket, for 1" High Rail</a>	\$12.14	8	\$97.12
<a href="#">Piping for System</a>	\$12.00	1	\$12.00
<a href="#">Miniature Air Compressor</a>	\$405	1	\$405
3D Print Charge	-	-	\$200
<a href="#">PLA Filament (Used to build frame)</a>	\$47.27	0.6	\$28.36
<a href="#">Wiring</a>	\$4.50	1	\$4.50
<a href="#">Female Banana Plug Lead</a>	\$8.34	2	\$16.68
<a href="#">Ethanolamine, 99%, 250mL</a>	\$43.01	1	\$43.01

### Returning Teams

Teams that participated in the 2023, 2024, and/or 2025 competitions are not allowed to reuse a previous design and must display an appreciable change. This can be shown as:

- Material size difference in the vessels containing the active material
- Difference process flow configurations
- Different sorbent

We encourage teams to explore different avenues and experiment with different capture methods; however, the use of a different capture method is not required.


### Run Timing

Format: Each team will compete in two separate runs; each takes place over 20 minutes.


- The first 5 minutes will be setup/startup of the cube.
  - Note that any CO<sub>2</sub> capture capacity consumed during this setup period will NOT count towards your total CO<sub>2</sub> captured, so make sure that your set-up/start-up procedure is appropriate to maintain the viability of your capture device during the run.
- The next 10 minutes, the cube will run autonomously.



- This will be the recorded period during which the run is scored. Outlet air concentration, flow rate, temperatures, and cube power consumption is measured and recorded every minute during this period.
- Final 5 minutes will be the shutdown and disconnection of the cube.

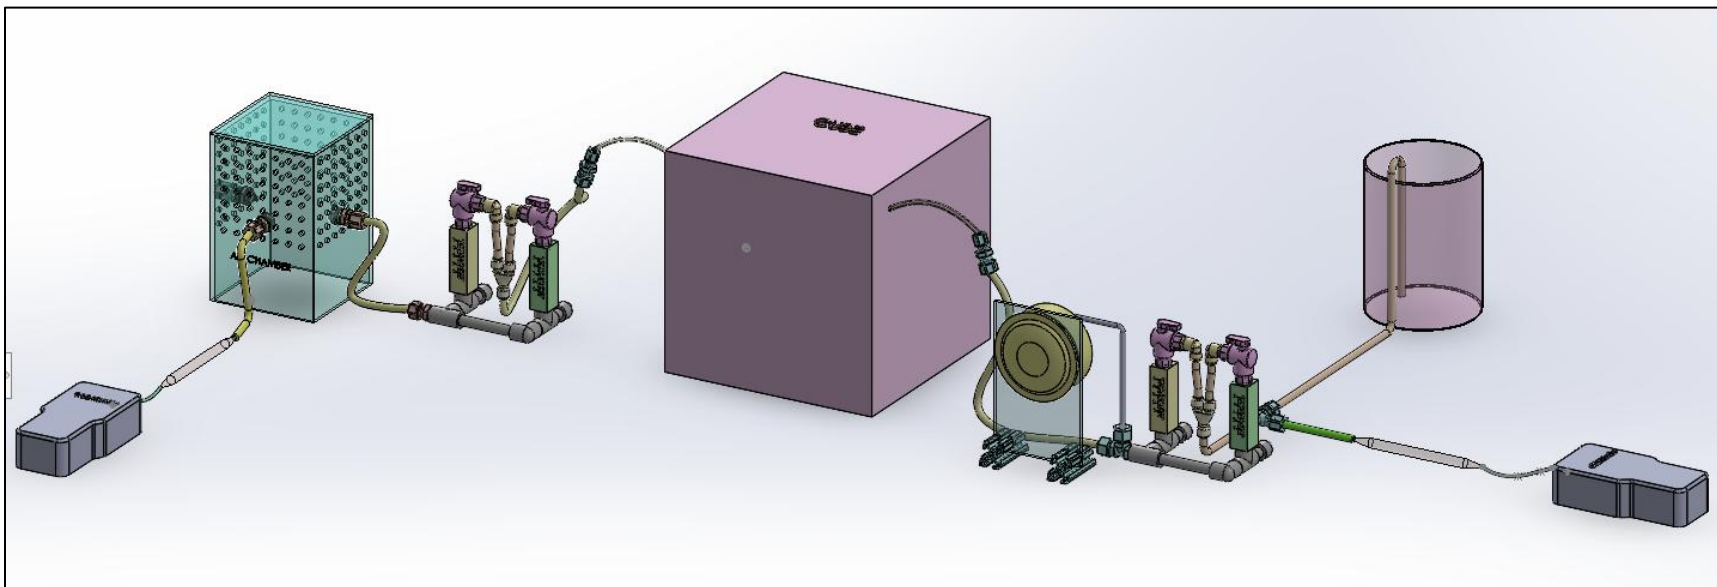

*Figure 6: 3D Render of the Setup during the Competition. Power connections are omitted in this figure.*

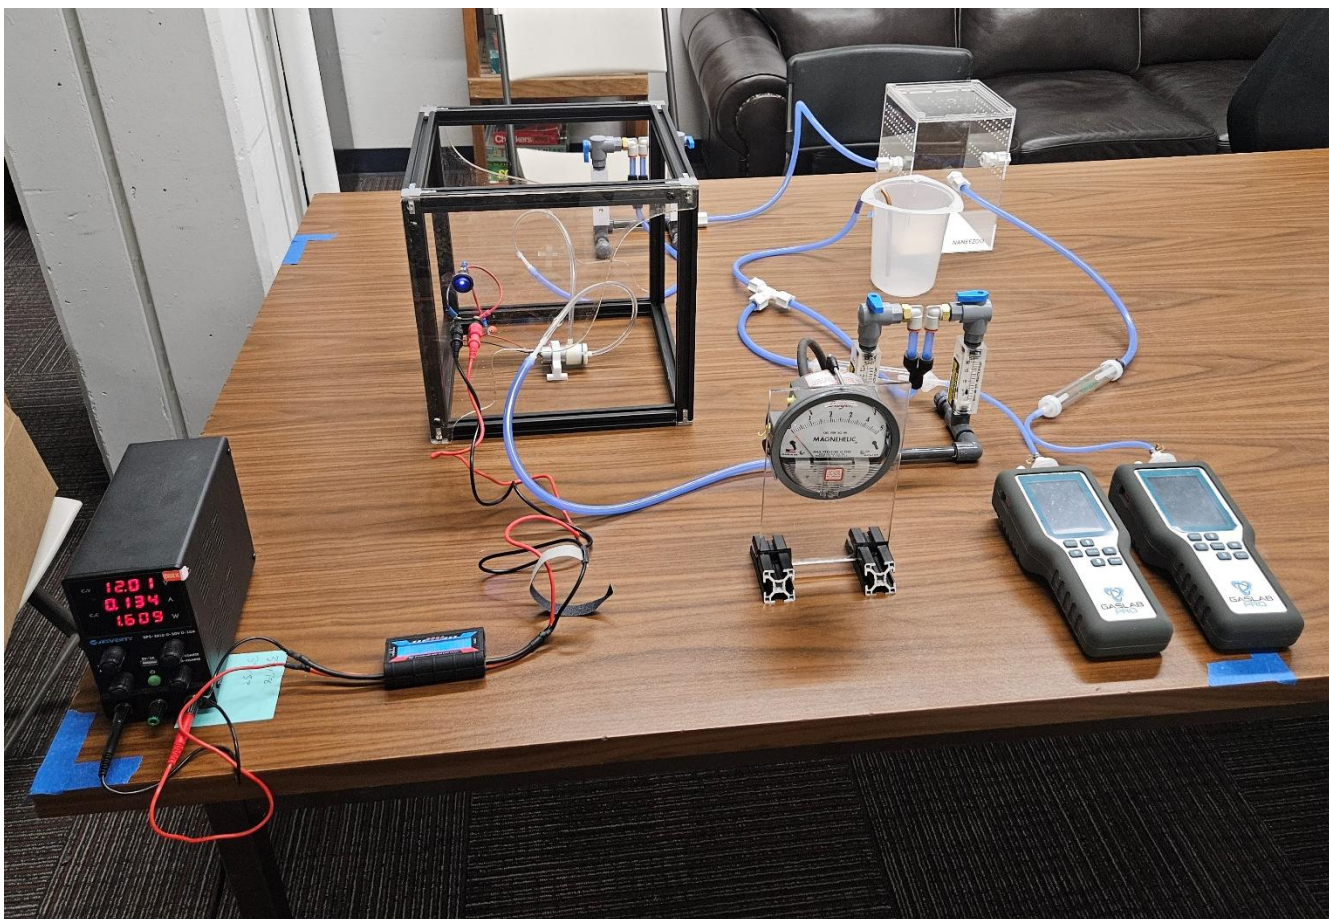

*Figure 7: Example of setup during the competition.*



*\*NEW\** Run Scoring Criteria

<b>Table 2: ChemE Cube: Direct Air Capture Scoring Criteria</b>					
<b>Metric</b>	<b>Temp</b>	<b>Wager Bonus</b>	<b>Mass Weighted</b>	<b>Cost Weighted</b>	<b>Power Weighted</b>
<b>Max Points Avail</b>	<b>5</b>	<b>15</b>	<b>60</b>	<b>60</b>	<b>60</b>
<b>Group 1</b>	5 (<100F)	15 (<10% error)	60 (>30.0)	60 (>0.18)	60 (>80)
<b>Group 2</b>	-	-	48 (>15.0)	48 (>0.12)	48 (>40)
<b>Group 3</b>	-	-	36 (>8.0)	36 (>0.08)	36 (>15)
<b>Group 4</b>	-	-	24 (>3.0)	24 (>0.025)	24 (>2)
<b>Group 5</b>	-	-	12 (>0.8)	12 (>0.005)	12 (>0.5)
<b>Group 6</b>	0 (>100F)	0 (>10% error)	0 (<0.8)	0 (<0.005)	0 (<0.5)

This year, points will be awarded on a range of values determined by the amount of CO<sub>2</sub> capture in relation to the weight of your cube, the capital cost of your cube, and the amount of power your cube draws inside a 10-minute run.

In addition, we will be ranking each team's cost-to-capture based on the regeneration method the team has chosen. Cost to capture points will be ranked in order of lowest \$/ton CO<sub>2</sub> to highest. This year, bonus points is awarded to the team's best run.

<b>Table 3: Lowest Cost to Capture Bonus Points</b>	
<b>Place finish (lowest \$/ton is 1<sup>st</sup> place...)</b>	<b>Points Awarded</b>
1	150
2	130
3	110
4	100
5	80
6	70
7	60
8	40
9	20
10	10
11-24	0



## CO<sub>2</sub> Capture Wager

Runs will also include an aspect to allow teams to demonstrate their control of the DAC reactions in their cube systems. At the beginning of each run, teams use the current CO<sub>2</sub> concentration in the Air Inlet Ballast Tank, and they will submit a wager on the total amount of CO<sub>2</sub> they believe their cube will capture during the run. Teams can download the CO<sub>2</sub> wager calculator on the ChemE Cube website.

## Scoring Calculations

This year, the competition will emphasize the total amount of CO<sub>2</sub> teams will capture during their runs. Last year, judges noticed that teams primarily focused on achieving 0 ppm CO<sub>2</sub> concentration at their outlet. Teams discovered that they could reach this target at any flowrate and may have chosen to operate at lower flowrates to ensure success. However, this strategy limited their scoring potential. Lower flowrates correlate to a lower amount in the total mass of CO<sub>2</sub> captured, which will directly decrease points earned. The scoring criteria weights performance is based on the total amount of CO<sub>2</sub> removed from the air.

Below are the calculations that calculate each metric.

$$\text{Mass Weighted Value} = \left( \frac{\text{Mass of CO}_2 \text{ Captured (mL)}}{\text{Mass of Loaded Cube (g)}} \right) \times 1000$$

$$\text{Cost Weighted Value} = \frac{\text{Mass of CO}_2 \text{ Captured (mL)}}{\text{Capital Cost of Cube (\$)}}$$

$$\text{Power Weighted Value} = \frac{\text{Mass of CO}_2 \text{ Captured (mL)}}{\text{Total Power Consumed (wH)}}$$

## Cost to Capture Calculations

$$\text{Cost to Capture} = \frac{F + P + R}{C_r}$$

$$C_r = \text{mass of CO}_2 \text{ Captured during demonstration run}$$

$$F = \text{Fixed Cost (Capital Component)} = \frac{M_c}{A} \times \frac{(1 \text{ year})}{(365 \text{ days})} \times \frac{(1 \text{ day})}{(1440 \text{ mins})} \times \left( 10 \frac{\text{min}}{\text{run}} \right)$$

$$M_c = \text{Reported Price of Cube}$$

$$A = \text{Amortization factor} = 25 \text{ years}$$

$$P = \text{Power Cost (Variable Component)} = P_r \times M_p$$

$$P_r = \text{Power consumed during demonstration run, kWh}$$



$$M_p = \text{Commercial electricity cost} = \frac{\$0.20}{kWh}$$

$$R = \text{Sorbent Regen Cost (Variable Component)} = S \times M_R \times y$$

$$S = \text{Sorbent weight loaded, tonne}$$

$$M_R = \text{Sorbent Regen Cost, \$/tonne}$$

$$y = \text{competition scaling factor} = 0.1$$

Note: This calculation treats all loaded sorbent as fully utilized, so participants will be charged full regen costs assuming the sorbent is saturated, even if in competition the sorbent is under-utilized. As such it behooves teams to fully consume their sorbent.

Example  $M_R$  values:

REGEN METHOD	COST, \$/tonne
Strong Base, no precipitation	467.64
Strong Base, causticization precipitation	265.30
Strong Base, Bi-polar Membrane Electrodialysis	289.39
Amino Acid (PyBIG)	183.07
Lewatit (Ion Exchange Resin) w/ TVSA	58.76
Lewatit (Ion Exchange Resin) w/ TSA	62.65
MOF (MIL 101CR) w/ TVSA	58.07
MOF (MIL 101CR) w/ TSA	60.57
Supported Amine (PEI) w/ TVSA	46.70
Supported Amine (PEI) w/ TSA	49.20
Algae (w/ BECCS)	80.00
Moisture Swing Ion Exchange Resin (I-200)	40.00
Ammonium Carbamate to Urea (out of cube)	385.77
Ammonium Carbamate to Urea (inside cube)	242.80

Note that  $M_R$  values are calculated assuming a \$0.20/kWh cost of energy and factoring literature values for heat capacity, latent heat, heat of reaction, regeneration temperatures, and special handling costs for processing the sorbent. Regen costs also assume full utilization of sorbent (CO<sub>2</sub> saturated).